

# RAMB-01/TH



Integrated bracket for easy installation, far away from engine's vibrations

Full technopolymer housing, totally insulated from eddy current, ideal for generator applications

Designed to fit throttle cable and to set sheath's tension

Integrated adjustable end-stroke limit switches

*Staffa integrata per una facile installazione, lontano dalle vibrazioni del motore*

*Custodia completa in tecnopolimero, totalmente isolata da correnti parassite, ideale per applicazioni con generatori*

*Progettato per montare il cavo dell'acceleratore e per regolare la tensione della guaina agevolmente*

*Finecorsa integrati e regolabili*



**Features | Caratteristiche tecniche**

DC Motors   Motori DC	12÷24÷36 V
Maintenance free   Privo di manutenzione	
Standard protection   Protezione standard	IP44
Operating temperature   Temperatura di esercizio	-10C° ÷ +80C°


**Options | Opzioni**

Increased IP   Indice IP aumentato
Customizable stroke   Corsa personalizzabile

Max thrust Push/Pull [N] Spinta massima	Max speed [mm/s] Velocità massima	Stroke length [mm] Corsa	Installation dim. [mm] Misura di installazione
300	1,6	max 50*	285
	2,8		
	5		

\*Longer stroke available upon request | Corse maggiori disponibili su richiesta

**Speed vs. Load | Velocità / Carico**

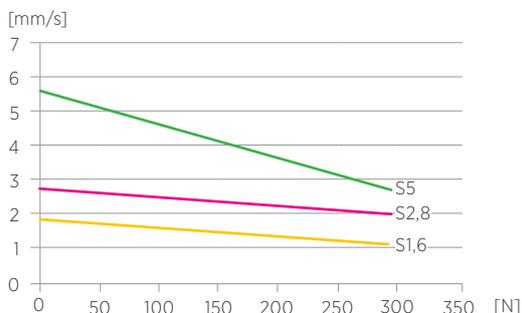

**Current vs. Load | Assorbimento / Carico**

