

RAO-4



- Silent working worm gearbox
- Oversized bearings for high resistance to radial and axial loads Compact full metal body design
- High gear ratio in a small gearbox dimension
- Various gear ratio available to achieve 48 - 195 rpm range
- Built-in encoder without affecting the standard overall dimensions



Riduttore a vite senza fine
Cuscinetti sovradimensionati per alta resistenza a carichi radiali e assiali
Design compatto con corpo completamente in metallo
Elevato rapporto di trasmissione in un riduttore di piccole dimensioni
Vari rapporti di trasmissione disponibili per una gamma da 48 a 195 giri / min
Encoder integrato



Features | Caratteristiche tecniche


DC Motors Motori DC	12÷24÷36 V
Maintenance free Privo di manutenzione	
Duty cycle Ciclo di lavoro	S3 10% based on 10 min. S3 10% basato su 10 min.
Operating temperature Temperatura di esercizio	-10C° ÷ +60C°

Options | Opzioni

Encoder | Permanente, digitale

Torque S1 [Nm] Momento S1	Torque S3 10% [Nm] Momento S3 10%	Max Torque [Nm] Momento Max	Speed up to [rpm] Velocità massima	RR
6	13	25	48	1/69
2,8	7,3	25	75	1/69
1,2	3,54	12	195	1/26

Speed vs. Load | Velocità / Carico

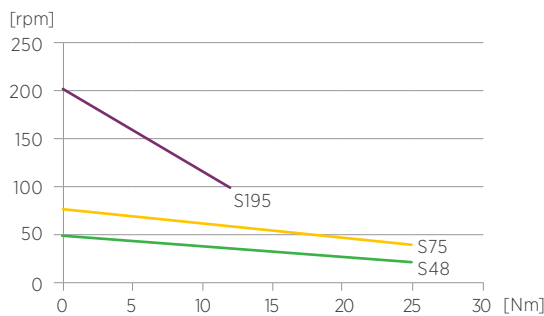

Current vs. Load | Assorbimento / Carico

